



ZHEJIANG FULLWILL ELECTRIC CO., LTD.

Address: Suly Industrial Zone, Liushi Town, Yueqing City, Zhejiang Province, China

Mobile: 0086 13706770280

Tel: 0086-577-61728833

Fax: 0086-577-61728822

Website: www.usfull.com / www.usfull.net

E-mail: scarlett@usfull.com

USFULL[®]

ZHEJIANG FULLWILL ELECTRIC CO., LTD.




PV Products

www.usfull.net

www.usfull.com



Website

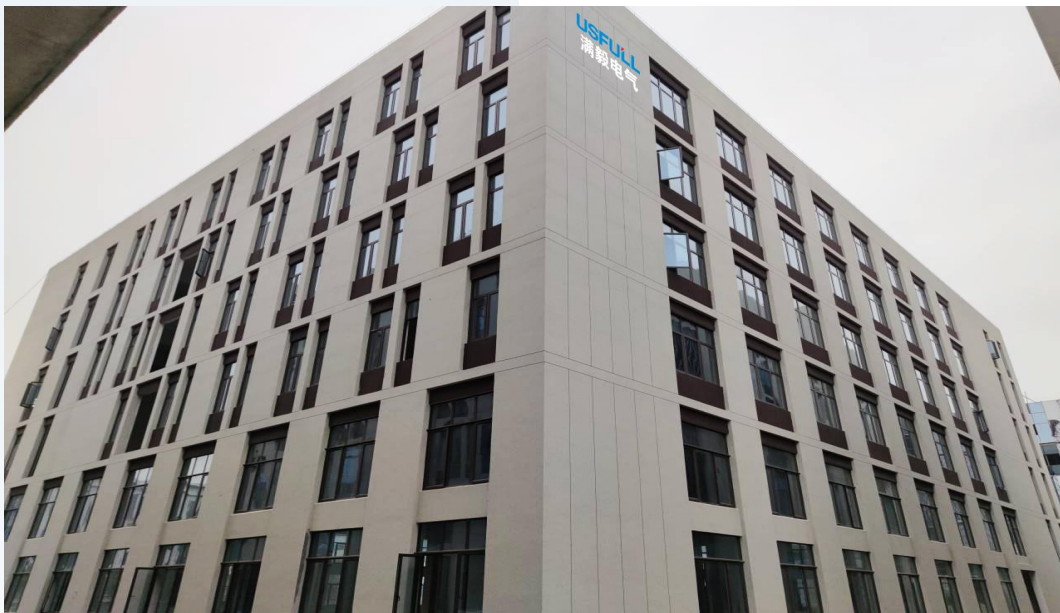

Company Introduction



**Full of confidence,
Will only offer satisfactory quality.**

Zhejiang Fullwill Electric Co., Ltd. (brand: USFULL) was established in 2005. The company focuses on the R&D, manufacture and sales of products in four major areas, including industrial VFD, solar pump inverter, PV accessories, and low-voltage electrical products.

We have strong manufacture department and quality control department, to ensure state-of-art quality, stable performance and in-time delivery.

Full of energy, full of goodwill. USFULL team will keep moving to supply best solutions to customers.



Innovation



Services




Quality



Sincerity

CONTENTS


DC MCB 10-63A	01
DC MCB 80-125A	02
DC MCCB 125-630A	03
DC Isolator Switch	04
DC Surge Protect Device (SPD)	05
DC Fuse	06
PV Combiner Box	07
PV Connector	09

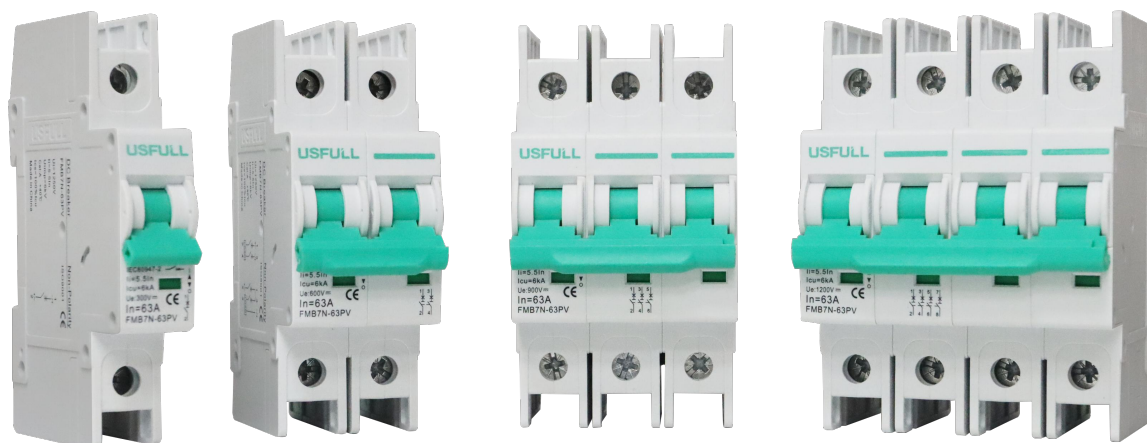

FMB7N-63PV DC Breaker (DC MCB)

Specification


FMB7 Series Circuit Breaker		FMB7N-63PV			
Frame Degree Rated Current		63A			
Pole		1P, 2P, 3P, 4P			
Rated Operating Voltage (VDC)		12V, 24V, 48V, 300V, 600V, 900V, 1200V			
Rated Current In (A)		10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A			
Rated Insulation Voltage Ui (VDC)		1250VDC			
Rated Impact Voltage Uimp (kV)		6			
Ultimate Breaking Capacity Icu (kA)		6			
Run Breaking Capacity Ics (%Icu)		100			
Curve Type		C			
Trip Type		Thermal-magnetic			
Mechanical	Actual average value	20000 times			
	Standard value	8500 times			
Electric	Actual average value	2500 times			
	Standard value	1500 times			
Wiring Capacity (mm²)		In≤32A, 1.5~6 mm², In ≥40A, 10~16mm²			
Ambient Temperature(°C)		-20°C~+70°C			
Atitude		≤2000 m			
Relative Humidity		≤9.5%			
Pollution Level		2, 3			
Installation Environment		No obvious shock and vibration			
Installation Category		Class II, Class III			
Installation		Standard din rail			
Dimensions (W)*(H)*(D) (mm)	W	18	36	54	72
	H	98	98	98	98
	D	71	71	71	71
Weight (KG)		0.12	0.24	0.36	0.48

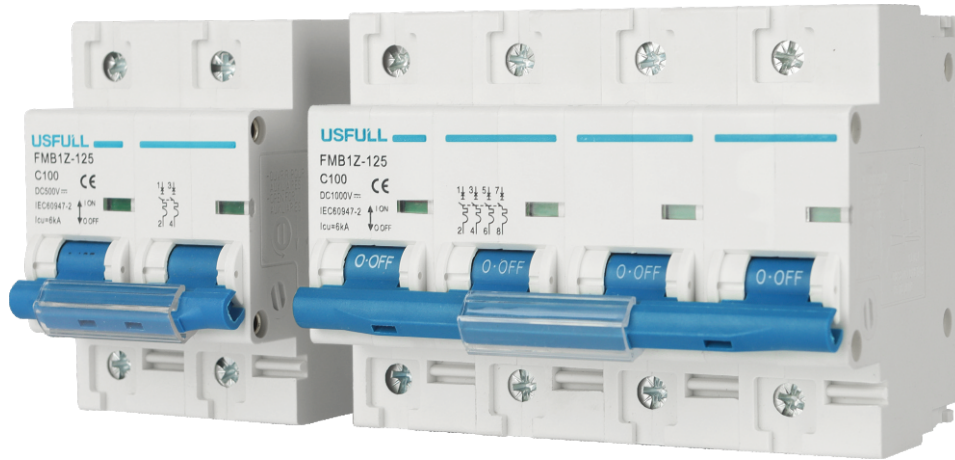

FMB1Z-125 DC Breaker (DC MCB)

Specification

FMB1Z Series Circuit Breaker		FMB1Z-125			
Frame Degree Rated Current		125A			
Pole		1P, 2P, 3P, 4P			
Rated Operating Voltage (VDC)		12V, 24V, 48V, 250V, 500V, 750V, 1000V			
Rated Current In (A)		80A, 100A, 125A			
Rated Insulation Voltage Ui (VDC)		1000VDC			
Rated Impact Voltage Uimp (kV)		6			
Ultimate Breaking Capacity Icu (kA)		6			
Run Breaking Capacity Ics (%Icu)		100			
Curve Type		C			
Trip Type		Thermal-magnetic			
Mechanical	Actual average value	20000 times			
	Standard value	8500 times			
Electric	Actual average value	2500 times			
	Standard value	1500 times			
Wiring Capacity (mm ²)		25~50mm ²			
Ambient Temperature(°C)		-20°C~+70°C			
Atitude		≤2000 m			
Relative Humidity		≤9.5%			
Pollution Level		2, 3			
Installation Environment		No obvious shock and vibration			
Installation Category		Class II, Class III			
Installation		Standard din rail			
Dimensions (W)*(H)*(D) (mm)	W	27	54	81	108
	H	80	80	80	80
	D	71	71	71	71
Weight (KG)		0.18	0.36	0.54	0.72

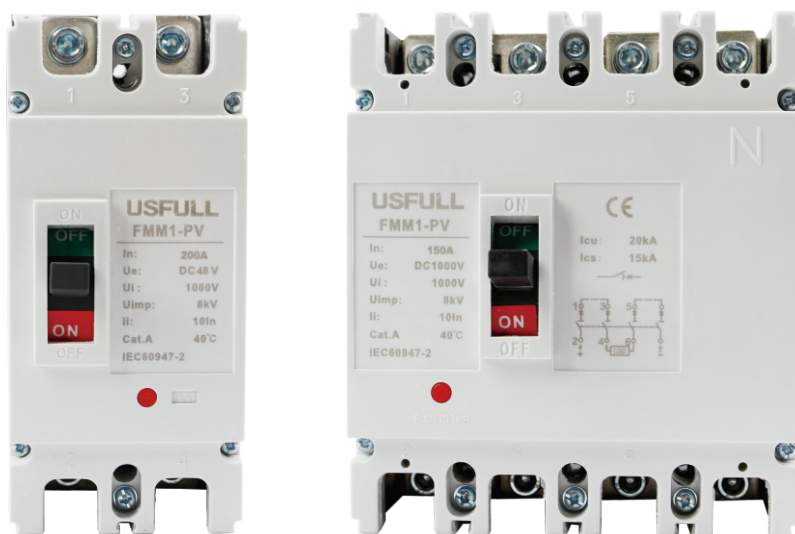

FMM1-PV DC Breaker (DC MCCB)

Specification

Type	FMM1-PV-125	FMM1-PV-250	FMM1-PV-400	FMM1-PV-630
Pole	2P, 4P			
Max. Rated Current	125A	250A	400A	630A
Rated Current In (A)	16/20/25/32/40/50 /63/80/100/125	100/125/150/200 /225/250	250/300/350/400	400/500/630
Rated Working Voltage Ue (VDC)	500V, 1000V			
Rated Insulated Voltage Ui (V)	1500V			
Rated Impulse Withstand Voltage	8 kV			
Short-Circuit Breaking Capacity (kA) Icu (Ics=75% Icu)	500V	25	35	35
	1000V	10	20	15
Isolator Capacity	Yes			
Operating Temperature	-25°C~+50°C			
Protection Grade	IP20			
Flashover Distance	≥ 50			
Instantaneous Action Value	10In±10%			
Installation Method	Fixed type			
Technical Standard	IEC60947-2, IEC60947-1, GB14048.1, GB14048.2			



FMPV 32-NL1 DC Isolator

Specification


Type	FMPV32-NL1
Function	Isolating, Controlling
Standard	IEC60947-3, AS60947. 3
Pole Number	4P
Max Rated Current	32A
Rated Working Voltage (Ue)	1200VDC
Rated Current (Ie)	16A, 25A, 32A
Rated Insulated Voltage (Ui)	1200VDC
Rated Short-Time Withstand Current (Icw)	1kA, 1S
Rated Implused Voltage (Uimp)	8kV
Overvoltage Category	II
Polarity	Non polarity, "+"and "-"polarities could be interchanged
Mechanical	18000 times
Electrical	2000 times
Ingress Protection	IP20
Storge Temperature	-40°C ~ +85°C
Mounting Type	Vertically or horizontally
Pollution Degree	3



FLY1-PV DC Surge Protect Device(DC SPD)

Specification


Type		FLY1-20PV	FLY1-40PV	FLY1-60PV
Pole		2P/3P		
Rated Voltage	2P	DC 500V 600V, 800V, 1000V		
	3P	DC 500V 600V, 800V, 1000V, 1200V, 1500V		
Min. Discharge Current (In)		10kA	20kA	30kA
Max. Discharge Current (Imax)		20kA	40kA	60kA
Voltage Protection Level		1.9kV~5.5kV		
Operating Temperature		-40°C to +85°C		
Relative Humidity		≤95% (25°C)		
Installation Method		35mm Din Rail		
Window Indicates		Normal: Green Feailure: Red		
Degree of Protection		IP20		
Leakage		< 20		

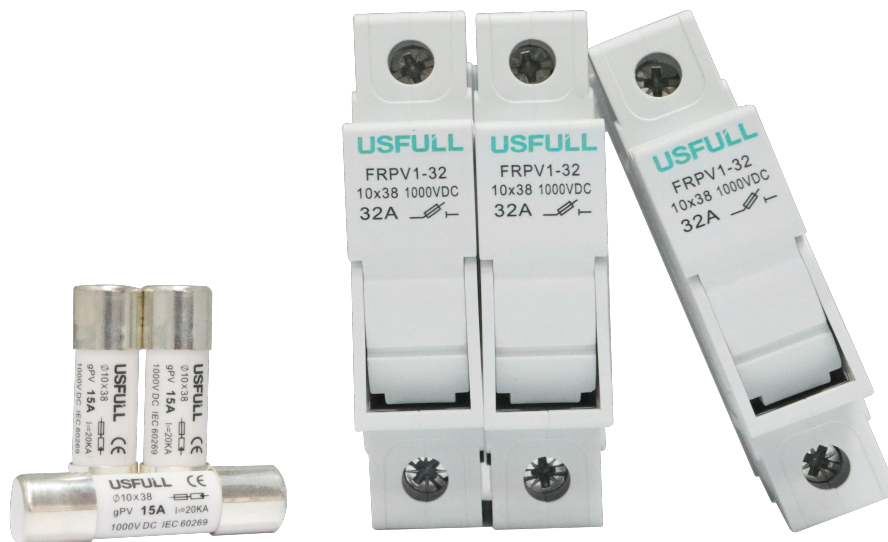

FRPV Series DC Fuse

Specification

Type	FRPV1-32	FRPV-63
Pole	1P/2P	
Rated Voltage	DC 1000V	DC 1500V
Rated Current (A)	4, 5, 6, 8, 10, 12, 15, 20, 25, 30, 32	4, 5, 6, 8, 10, 12, 15, 20, 25, 30, 32, 40, 50, 63
Short-Circuit Breaking Capacity	20kA	33kA
Max. Power Attenuation	4.0W	6.0W
Protection Grade	IP20	
Connection	1.5-16mm ²	
Operation Ambient Temperature	-30°C to +70°C	
Resistance and Damp Hot	Class 2	
Elevation	≤ 2000m	
Installation Way	TH35-7.5/DIN35 Rail Installation	
RH (relative air humidity)	when+20°C, not exceed 95%; when+40°C, not exceed 50%	
Pollution Class	2/3	
Installation Environment	the place of no obvious vibrate & impact	
Installation Class	III	
W*H*L (mm)	18*69*80	24*65*136

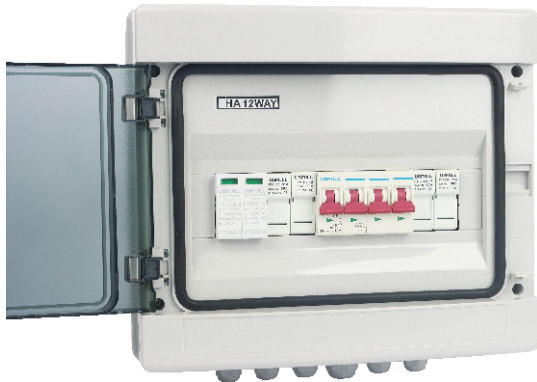

Specification

Model	FUCB-MDP2/1N	FUCB-MDP3/1N	FUCB-MDP4/1N
Number of DC Inputs	2	3	4
Material of Box	ABS		
Max. Rated Voltage DC	1000V		
DC Fuse	15A (Recommend 15A, support other ampere)		
Fuse Holder	1000V DC 32A		
DC Breaker	32A	50A	63A
Surge Protection DC	Type II, In =20kA, I _{max} =40kA, U _{cpv} =1000V DC		
Over-Voltage Category	Cat III		
Connection Type DC Input	PG09/PV Connector, IP68		
Input Cable Size for Negative and Positive	Φ4-8mm		
Number of DC Outputs	1 (Support customize for output number)		
Connection Type DC Output	PG13.5		
Ambient Temperature Range/Humidity	Temperature: -20°C~ +60°C, Humidity: 0-99%		
Altitude	≤ 2000m Derating for above 2000m		
Installation	Wall mounting/ Padlockable latch		

Optional Customized Service:

1. Support PV connector
2. Support drawing customization
3. Support installation of DC isolator switch
4. Support 2 input 2 output, 4 input 2 output, etc.



Specification

Model (FUCB Series)	MD2/1	MD4/1	MD6/1	MD8/1	MD10/1	MD12/1	MD14/1	MD16/1	MD18/1	MD20/1	MD22/1	MD24/1
Number of DC Inputs	2	4	6	8	10	12	14	16	18	20	22	24
Material of Box	Coated Iron											
Protection Level	IP65											
IK Impact Resistance Class	IK08											
Max. Rated Voltage DC	1000V (Support 1500V)											
DC Fuse	15A (Recommend 15A, support other ampere)											
Fuse Holder	1000V DC 32A											
DC Breaker	32A	63A	100A	125A	150A	200A	225A	250A	275A	300A	315A	350A
Surge Protection DC	Type II, In=20kA, I _{max} =40kA, U _{cpv} =1000V DC (Support 1500V)											
Over-Voltage Category	Cat III											
Diode for The Function of Anti-Reflux	Build in											
Connection Type DC Input	PG09/PV connector, IP68											
Input Cable Size for Negative and Positive	Φ4-8mm											
Number of DC Outputs	1 (Support customize for output number)											
Connection Type DC Output	PG11	PG11	PG13.5	PG19	PG19	PG19	PG25	PG25	PG29	PG29	PG29	PG29
Gland Connectors	Material: Nylon Plastic, Seals: Nitrile Rubber Buna, IP68											
Ambient Temperature Range/Humidity	Temperature: -20°C~+60°C, Humidity: 0-99%											
Altitude	≤2000m Derating for above 2000m											
Installation	Wall mounting/Padlockable latch											

Optional Customized Service:

1. Support 1500V
2. Support PV connector
3. Support monitoring function
4. Support installation of DC isolator switch
5. Support 2 input 2 output, 4 input 2 output, etc.



Specification


Connector System	φ 4mm
Rated Voltage	1000V/ 1500V DC
Rated Current	17A(1.5mm²) 22A(2.5mm²; 14AWG) 30A(4,6mm²; 10,12AWG)
Test Voltage	6kV(50Hz, 1 min.)
Ambient Temperature Range	IEC: -40℃ ~ +90℃ UL: -40℃ ~ +75℃
Upper Limiting Temperature	IEC: +105℃
Degree of Protection, Mated, Unmated	IP67, IP2X
Contact Resistance of Plug Connector	0.5mΩ
Safety Class	II
Contact Material	copper alloy, tin plated
Insulation Material	PC/ PPO
Locking System	Snap-in
Flame Class	UL94-V0
Salt Mist Spray Test, Degree of Severity 5	IEC 60068-2-52
Connector Type	General tye, Diode type, Fuse type



T Type

Specification

Connector Type	2T/ 3T/ 4T/ 5T/ 6T
Rated Voltage	1000VDC
Rated Current	20A(4mm ²) 30A(6mm ²)
Single Core Cable Section	1.5mm ² ~ 6mm ²
Cable Outer Diameter	1.5mm ² ~ 6mm ²
Ambient Temperature Range	-40°C ~ +105°C
Degree of Protection, Mated	IP67
Contact Resistance	≤0.5mΩ
Insulation Resistance	>500mΩ
Contact Material	Copper alloy, tin plated
Insulation Material	PPO, Black
Terminal Connection	Crimping
Flame Class	UL94-V0
Safety Class	II

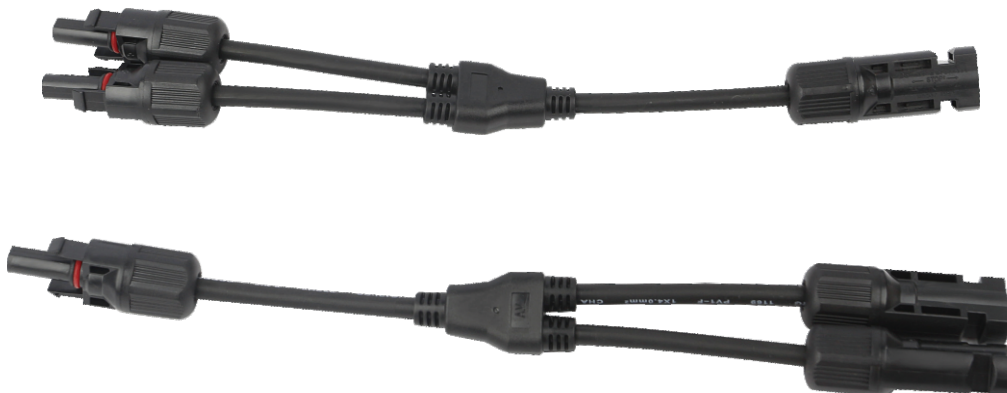

Y Type

Specification

Connector Type	2Y/ 3Y/ 4Y
Rated Voltage	1000VDC
Rated Current	20A(4mm ²) 30A(6mm ²)
Single Core Cable Section	1.5mm ² ~ 6mm ²
Cable Outer Diameter	1.5mm ² ~ 6mm ²
Ambient Temperature Range	-40°C ~ +105°C
Degree of Protection, Mated	IP67
Contact Resistance	≤0.5mΩ
Insulation Resistance	>500mΩ
Contact Material	Copper alloy, tin plated
Insulation Material	PPO, Black
Terminal Connection	Crimping
Flame Class	UL94-V0
Safety Class	II